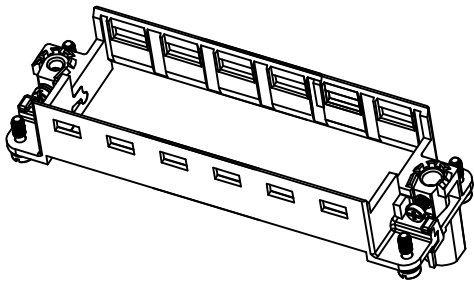
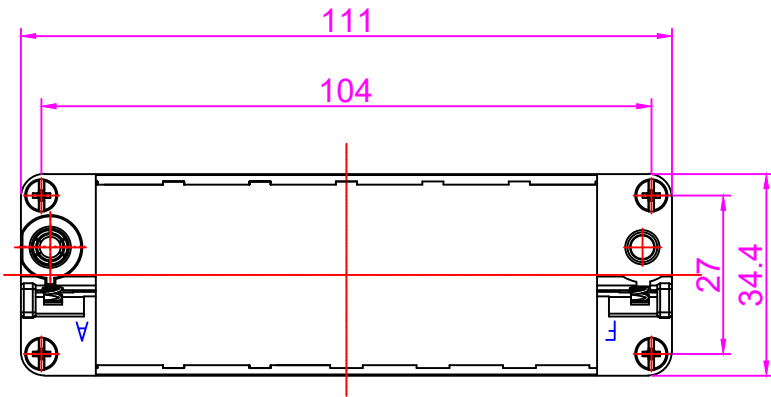
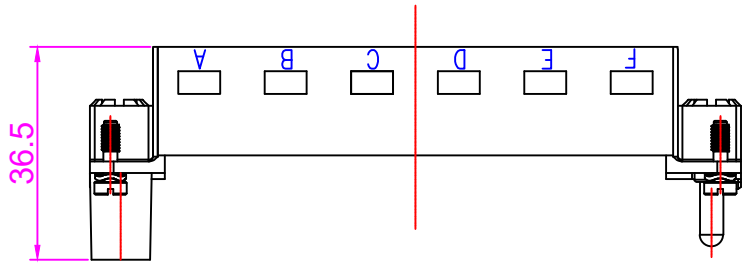




| REVISION DATA | | | | |
|---------------|-----|-------------|------|----------|
| SYM | ECN | DESCRIPTION | DATE | APPROVED |
| | | | | |
| | | | | |



技术参数:
 材料: 锌合金
 表面处理: 镀锌
 温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 模块数量: 6
 接地线、
 功率线: $4 \sim 10\text{mm}^2$ (AWG12-8)
 信号线: $1 \sim 2.5\text{mm}^2$ (AWG18-14)
 插拔次数: ≥ 500

Specifications:
 Material: zinc alloy
 Surface: Galvanization
 Limiting temperatures: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 Number of modules: 6
 PE contact,
 Power side:
 Wire gauge-- mm^2 : 4.0~10 mm^2
 Wire gauge--AWG: 12-8
 Signal side:
 Wire gauge-- mm^2 : 1.0~2.5 mm^2
 Wire gauge--AWG: 18-14
 Mechancial working life (Mating cycles): ≥ 500

| | | | | | | | |
|--------------------|------------|-----------|------|-------|---|--|-----|
| Tolerance | | SIGNATURE | DATE | Units | mm |  宁波欧科瑞连接器有限公司 NINGBO OUKERUI CONNECTOR CO., LTD. | |
| $0 \sim \leq 20$ | ± 0.15 | DRAW | | Size | A4 | | |
| $20 \sim \leq 50$ | ± 0.25 | DESIGN | | Scale | | PART NAME: HZW-HF24B-UA | |
| $50 \sim \leq 80$ | ± 0.35 | CHECK | | Sheet | | Drawing NO. | REV |
| $80 \sim \leq 120$ | ± 0.50 | APPROVE | | Proj. |  | Material | A |